

DOE適合品モデルSPECシート:UN312(12W)/UN318(18W) Wall Mount形状

【INPUT SPEC】	ITEM	SPECIFICATION	MODEL											
			UN312-0520			UN312-1210			UN318-0530			UN318-1215		
			MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
	AC INPUT VOLTAGE	SINGLE PHASE		100-240V			100-240V			100-240V			100-240V	
	AC INPUT VOLTAGE RANGE	SINGLE PHASE	90V		264V	90V		264V	90V		264V	90V		264V
	AC INPUT FREQUENCY	SINGLE PHASE	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz
	AC INPUT CURRENT	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LOAD.		0.23A	0.28A		0.23A	0.28A		0.37A	0.4A		0.37A	0.4A
	AC INRUSH CURRENT	TYPICAL INPUT VOLTAGE & .FOR A COLRD START AT 25°C			40A			40A			40A			40A
	DOE EFFICIENCY	THE ADAPTOR SHALL ACCORD WITH THE REQUEST OF DOE VI	79%			83.26%			81.39%			85%		
	STAND BY CONSUMPTION	THE ADAPTOR SHALL ACCORD WITH THE REQUEST OF DOE VI			0.075w			0.075w			0.1W			0.1W
	LEAKEGE CURRENT	MAX INPUT VOLTAGE			0.25mA			0.25mA			0.25mA			0.25mA

【OUTPUT SPEC】	ITEM	SPECIFICATION	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
	NOMINAL DC OUTPUT VOLTAGE			5V			12V			5V			12V	
	DC PITPIT VOLTAGE RANGE	TYPICAL OUTPUT VOLTAGE	4.75V		5.25V	11.4V		12.6V	4.75V		5.25V	11.4V		12.6V
	LOAD CUREENET				2.0A			1.0A			3.0A			1.5A
	RIPPLE	TYPICAL INPUT VOLTAGE, FULL LOAD CURRENT, 25°C			100mV			120mV			150mV			120mV
	NOISE	TYPICAL INPUT VOLTAGE, FULL LOAD CURRENT, 25°C			100mV			240mV			150mV			240mV
	HOLD-UP TIME	AT TYPICAL INPUT VOLTAGE & LORD .50Hz	10mS			10mS			10mS					10mS
	TURN-ON DELAY	TYPICAL INPUT VOLTAGE & FULL LOAD CURRENT			3S			3S			3S	3S		


* PROTECTION	
OVER CURRENT PROTECTION	AUTO RECOVERY
SHORT CIRCUIT PROTECTION	THE ADAPTOR SHALL NOT DAMAGE BY SHORT TO THE DC OUTPUT GROUND
OVER VOLTAGE PROTECTION	AUTO RECOVERY

【ENVIRONMENT】	ITEM	SPECIFICATION OR TEST CONDITION	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
	OPRATING TEMPERATURE		0°C		40°C	0°C		40°C	0°C		40°C	0°C		40°C
	STOREGE TEMPERATURE		-20°C		65°C	-20°C		65°C	-20°C		65°C	-20°C		65°C
	OPRATING HUMIDITY	NON-CONDENSING	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH
	STOREGE HUMIDITY	NON-CONDENSING	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH

【SAFETY】 「PSE」 「cULus」 「CE」

【MECHANICAL SPEC】

UN312/318形状 (63.9x49.5x29.5mm)

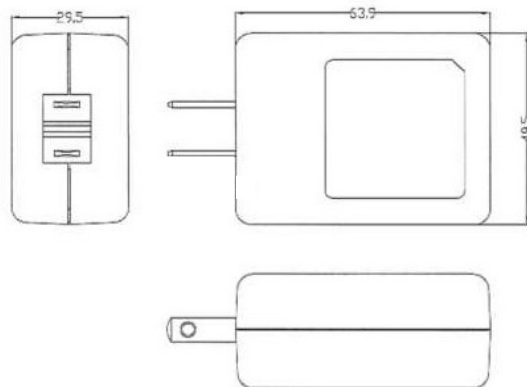

UNIFIVE

株式会社 ユニファイブ
 東京本社: 〒101-0041 東京都千代田区神田須田町1-12-6
[TEL:03-5577-5456](tel:03-5577-5456)
 大阪営業所: 〒532-0011 大阪府大阪市淀川区西中島5-7-18
[TEL:06-6300-7851](tel:06-6300-7851)
<http://www.unifive.com> E-mail: info@unifive.com

* 本資料は2016年1月25日更新の為、一部内容に変更・更新が発生する場合がございます。
 詳細情報について別途、ホームページまたはお電話でお問合せ頂きますようお願い申し上げます。

*CASE TOLERANCE: ±0.8mm