


## DOE適合品モデルSPECシート:UNI312(12W)/UNI318(18W) INLET形状

【INPUT SPEC】		MODEL											
		UNI312-0520			UNI312-1210			UNI318-0530			UNI318-1215		
ITEM	SPECIFICATION	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
AC INPUT VOLTAGE	SINGLE PHASE		100-240V						100-240V				
AC INPUT VOLTAGE RANGE	SINGLE PHASE	90V		264V	90V		264V	90V		264V	90V		264V
AC INPUT FREQUENCY	SINGLE PHASE	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz	47Hz	50/60Hz	63Hz
AC INPUT CURRENT	TYPICAL INPUT VOLTAGE & OUTPUT AT FULL LORD.		0.23A	0.28A		0.23A	0.28A		0.37A	0.4A		0.37A	0.4A
AC INRUSH CURRENT	TYPICAL INPUT VOLTAGE & .FOR A COLRD START AT 25°C			40A			40A			40A			40A
DOE EFFICIENCY	THE ADAPTOR SHALL ACCORD WITH THE REQUEST OF DOE VI	79%			83.26%			81.39%			85%		
STAND BY CONSUMPTION	THE ADAPTOR SHALL ACCORD WITH THE REQUEST OF DOE VI			0.075w			0.075w			0.1W			0.1W
LEAKEGE CURRENT	MAX INPUT VOLTAGE			0.25mA			0.25mA			0.25mA			0.25mA
【OUTPUT SPEC】		MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
NOMINAL DC OUTPUT VOLTAGE			5V			12V			5V			12V	
DC PTPIT VOLTAGE RANGE	TYPICAL OUTPUT VOLTAGE	4.75V		5.25V	11.4V		12.6V	4.75V		5.25V	11.4V		12.6V
LOAD CURENET				2.0A			1.0A			3.0A			1.5A
RIPPLE	TYPICAL INPUT VOLTAGE, FULL LOAD CURRENT, 25°C			100mV			120mV			150mV			120mA
NOISE	TYPICAL INPUT VOLTAGE, FULL LOAD CURRENT, 25°C			100mV			240mV			150mV			240mV
HOLD-UP TIME	AT TYPICAL INPUT VOLTAGE & LORD ,50Hz	10mS			10mS			10mS					10mS
TURN-ON DELAY	TYPICAL INPUT VOLTAGE & FULL LOAD CURRENT			3S			3S			3S			3S
* PROTECTION													
OVER CURRENT PROTECTION	AUTO RECOVERY												
SHORT CIRCUIT PROTECTION	THE ADAPTOR SHALL NOT DAMAGE BY SHORT TO THE DC OUTPUT GROUND												
OVER VOLTAGE PROTECTION													
【ENVIRONMENT】		MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX	MIN	TYPICAL	MAX
OPRATING TEMPERATURE	SPECIFICATION OR TEST CONDITION	0°C		40°C	0°C		40°C	0°C		40°C	0°C		40°C
STOREGE TEMPERATURE		-20°C		65°C	-20°C		65°C	-20°C		65°C	-20°C		65°C
OPRATING HUMIDITY	NON-CONDENSING	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH
STOREGE HUMIDITY	NON-CONDENSING	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH	5%RH		95%RH
【SAFETY】													
「PSE」「cULus」「CE」													

### 【MECHANICAL SPEC】

UNI312/318形状 (75.0x50.6x29.8mm)

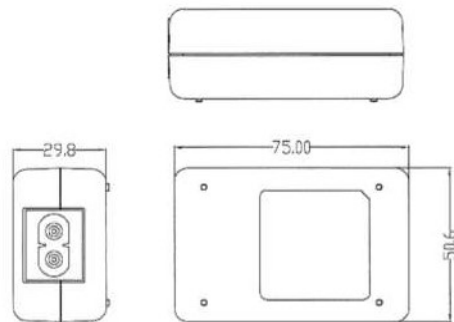

\*CASE TOLERANCE: ±0.8mm



株式会社 ユニファイブ  
 東京本社: 〒101-0041 東京都千代田区神田須田町1-12-6  
 TEL:03-5577-5456  
 大阪営業所: 〒532-0011 大阪府大阪市淀川区西中島5-7-18  
 TEL:06-6300-7851  
<http://www.unifive.com> E-mail:info@unifive.com

\*本資料は2016年1月25日更新の為、一部内容に変更・更新が発生する場合がございます。詳細情報について別途、ホームページまたは電話でお問合せ頂きますようお願い申し上げます。